

## Voltage Input Adapter Cable (CABLE-ADAPx)

For use with HOBO® ZW data nodes and compatible HOBO U12, UX120-006M, MX1104, and MX1105 data loggers

**HOBO**  
Data Loggers




CABLE-ADAP5 is a resistive voltage divider that allows sensor inputs of 5 VDC max. CABLE-ADAP10 allows sensor inputs of 10 VDC max and CABLE-ADAP24 allows sensor inputs of 24 VDC max.

### Specifications

	CABLE-ADAP5	CABLE-ADAP10	CABLE-ADAP24
<b>Max. Input</b>	0–5 VDC	0–10 VDC	0–24 VDC
<b>Accuracy with U12</b>	±4 mV ±2.7% of reading	±8 mV ±2.7% of reading	±20 mV ±2.7% of reading
<b>Accuracy with ZW</b>	±3.1 mV ±2.2%	±6.2 mV ±2.2%	N/A
<b>Accuracy with UX120-006M, MX1104, and MX1105</b>	±0.2 mV ±0.3% of reading	±0.4 mV ±0.3% of reading	±1.0 mV ±0.3% of reading
<b>Impedance</b>	20 K ohm	20 K ohm	48 K ohm
<b>Resolution with U12 and ZW</b>	0.03% of full scale		
<b>Resolution with UX120-006M, MX1104, and MX1105</b>	0.002% of full scale		
<b>Length</b>	1.9 m (6.3 ft) (all models)		
<b>Weight</b>	38.6 g (1.4 oz) (all models)		

### Using the voltage input adapter cable

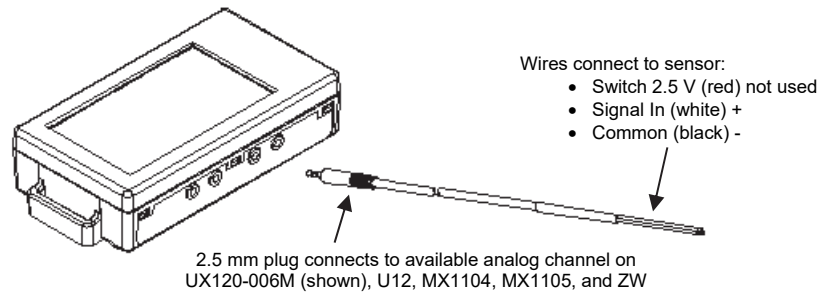

© 2010–2019 Onset Computer Corporation. All rights reserved. Onset and HOBO are registered trademarks of Onset Computer Corporation.

12358-E MAN-ADAPxx